


Beautiful yet Budget-Friendly

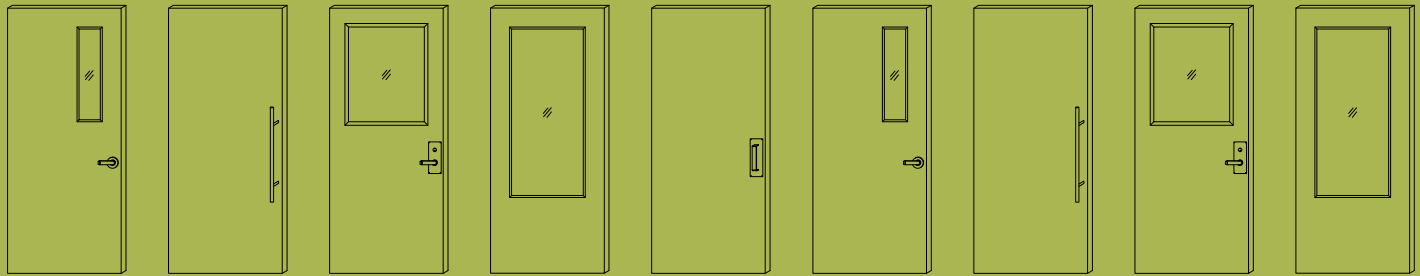

Eggers' 3 Ply Flush Door Simple. Effective. Affordable

- ▣ When you are looking for a more cost-effective option than our standard MDO, Eggers' 3-Ply Flush Door is the answer.
- ▣ Same Eggers Quality with the price flexibility you require
- ▣ Available with a primed or painted finish, these doors can be non-rated or 20-minute fire-rated.
- ▣ LEED® credits are available
- ▣ Lightweight core construction capabilities if desired

ENGINEERING SPECIFICATIONS 20-MINUTE FIRE DOOR DATA

	20-Minute Single	20-Minute Pairs	Non-Rated
Max. Size	4' x 10'	8' x 10' parallel and dbl. egress	4' x 10' (per leaf)
Thickness	1-3/4"		
Core	Particleboard, UF-free particleboard, FSC certified particleboard, stave, FSC certified stave, structural composite lumber (SCL), FSC certified structural composite lumber and agrifiber		
Max. Door & Transom Non-Rabbetted	4' x 14' (with transom bar)	4' x 14' (with transom bar)	4' x 14' with or without a transom bar or rabbetted
Stiles	MDO over 1" structural composite lumber		
Rails	1-1/8" structural composite lumber		
Reinforcements	Blocking for screw attached surface hardware required for agrifiber; not required for extra heavy duty applications for SCL and stave core or heavy duty applications with particleboard		
Faces	1/11" HDF crossband		
Lites	Up to 1296 sq. in. standard, SCL, and stave core available with 2868 sq. in. Beadless lite construction available -- requires maximum 6" top rail and factory glazing. Factory glazing recommended to comply with new NFPA standards		Size restricted only by min. margins Beadless lite construction available-- requires maximum 6" top rail and factory glazing
Louvers	Metal louvers up to 576 sq. in. where allowed by code		Wood or metal
Latching Hardware	Cylinders, mortised, unit, or card locks; 5" backset and deadbolts available		Most available latching hardware
Hinges	Per NFPA 80 - butts, pocket pivots, continuous hinges, pivots (electrical options available)		
Flushbolts	N/A	Automatic corner or extension bolts up to 36"	Corner or extension bolts up to 48"
Fire Exit Hardware	Rim, surface and concealed vertical rod (full or top rod only), and fire exit hardware		
Closers, Stops, Holders	Listed surface hardware or most concealed hardware having a mortise not exceeding 1-3/8" in width		
Drop Seals	Listed and approved surface, semi-mortised or mortised		
Special Details	Machining for hardware; installation of lites and louvers; applied moulding; beadless lite construction; kickplates; solid wood grillwork and divided lites; raceways		
Finish	Primed or opaque varnish only		
Warranty	Life of installation (interior)		
Standards	WDMA I.S. 1A, AWS Section 9 Edition 1, NFPA 252, UL 10B, UL 10C, NFPA 80		



**Stile & Rail Doors,
Door Frames, Plywood
Veneered Components**

Two Rivers Division
One Eggers Drive
Two Rivers, WI 54241
Phone: 920.793.1351
Fax: 920.793.2958

Flush Doors

Neenah Division
164 North Lake Street
Neenah, WI. 54956
Phone: 920.722.6444
Fax: 920. 722.0357

**Architectural Veneer Faces,
Custom Wood Products,
Plywood**

Kentucky Division
2125 Lake Jericho Road
Smithfield, KY 40068
Phone: 502.845.0154
Fax: 502.849.0444