



Eggers' Paintable Surface Beautiful and Budget-Friendly

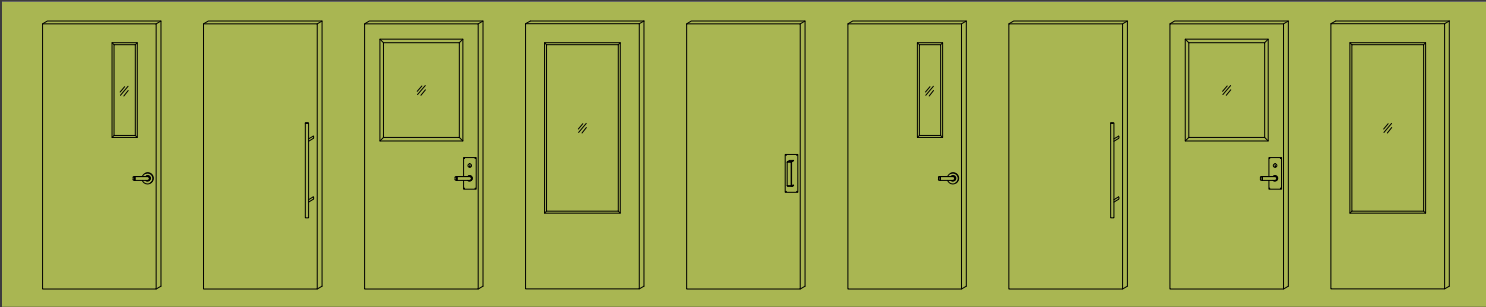

Simple. Effective. Affordable | A cost-effective, yet quality-driven paint grade flush door. Available with a primed or painted finish, the Paintable Surface Flush door can be ordered non-rated or with a 20-minute fire label. LEED® credit contribution and lightweight core capabilities are also options.

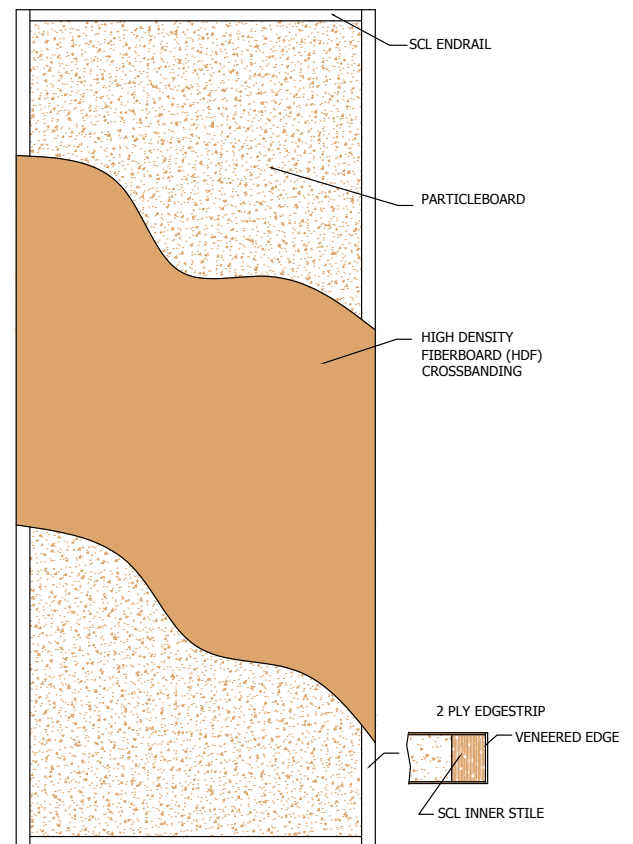

ENGINEERING SPECIFICATIONS 20-MINUTE FIRE DOOR DATA

| | 20-Minute Single | 20-Minute Pairs | Non-Rated |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Max. Size | 4' x 10' | 8' x 10' parallel and dbl. egress | 4' x 10' (per leaf) |
| Thickness | 1-3/4" or 1-3/8" | | |
| Core | Particleboard, UF-free particleboard, FSC® certified particleboard, stave, FSC certified stave, structural composite lumber (SCL), FSC certified structural composite lumber and agrifiber | | |
| Max. Door & Transom Non-Rabbetted | 4' x 14' (with transom bar) | 4' x 14' (with transom bar) | 4' x 14' with or without a transom bar or rabbetted |
| Stiles | MDO over 1" structural composite lumber | | |
| Rails | 1-1/8" structural composite lumber | | |
| Reinforcements | Blocking for screw attached surface hardware required for agrifiber; not required for extra heavy duty applications for SCL and stave core or heavy duty applications with particleboard | | |
| Faces | 1/11" HDF crossband | | |
| Lites | Up to 1296 sq. in. standard, SCL, and stave core available with 2868 sq. in. Beadless lite construction available -- requires maximum 6" top rail and factory glazing. Factory glazing recommended to comply with new NFPA standards | | Size restricted only by min. margins Beadless lite construction available-- requires maximum 6" top rail and factory glazing |
| Louvers | Metal louvers up to 576 sq. in. where allowed by code | | Wood or metal |
| Latching Hardware | Cylinders, mortised, unit, or card locks; 5" backset and deadbolts available | | Most available latching hardware |
| Hinges | Per NFPA 80 - butts, pocket pivots, continuous hinges, pivots (electrical options available) | | |
| Flushbolts | N/A | Automatic corner or extension bolts up to 36" | Corner or extension bolts up to 48" |
| Fire Exit Hardware | Rim, surface and concealed vertical rod (full or top rod only), and fire exit hardware | | |
| Closers, Stops, Holders | Listed surface hardware or most concealed hardware having a mortise not exceeding 1-3/8" in width | | |
| Drop Seals | Listed and approved surface, semi-mortised or mortised | | |
| Special Details | Machining for hardware; installation of lites and louvers; applied moulding; beadless lite construction; kickplates; solid wood grillwork and divided lites; raceways | | |
| Finish | Primed or opaque varnish only | | |
| Warranty | Life of installation (interior) | | |
| Standards | WDMA I.S. 1A, AWS Section 9 Edition 2, NFPA 252, UL 10B, UL 10C, NFPA 80 | | |



**Stile & Rail Doors,
Door Frames, Plywood
Veneered Components**

Two Rivers Division
One Eggers Drive
Two Rivers, WI 54241
Phone: 920.793.1351
Fax: 920.793.2958

Flush Doors

Neenah Division
164 North Lake Street
Neenah, WI. 54956
Phone: 920.722.6444
Fax: 920. 722.0357

**Architectural Veneer Faces,
Custom Wood Products,
Plywood**

Kentucky Division
2125 Lake Jericho Road
Smithfield, KY 40068
Phone: 502.845.0154
Fax: 502.849.0444