

ACOUSTIC GASKET SYSTEMS

Installation Instruction 118




Eggers Industries

Date: June, 2013

Installation of Perimeter Seals: Gasket System Q

1. Hang the door and adjust for proper clearances.
2. Install the Pemko 2005 threshold within the opening. The threshold should be installed parallel to the bottom of the door, shimming if required. When properly installed there should be a 1/8" clearance between the bottom of the door and the threshold when the door is closed. The threshold seal should be in uniform contact with the door face and slightly compressed. A sealant, such as silicone caulk, should be used to prevent sound transmission between the threshold and floor. Thresholds should not be mounted over carpeting as this will not allow a good seal.
3. Install a strip of DHSI 150 seal to the jambs and the header with the longest fin adjacent to the frames stop. Fins should be interlaced where they meet in the corners.

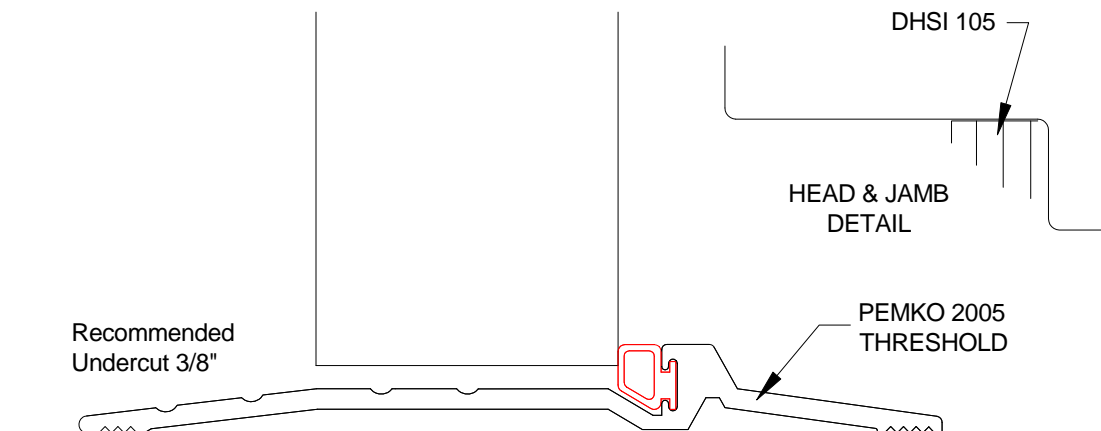

Stile and Rail Doors,
Door Frames, Plywood
Veneered Components

Two Rivers Division
One Eggers Drive
Two Rivers, WI 54241
Phone: 920.793.1351
Fax: 920.793.2958

Flush Doors

Neenah Division
164 North Lake Street
Neenah, WI 54956
Phone: 920.722.6444
Fax: 920.722.0357

Architectural Veneer Faces,
Custom Wood Products,
Plywood

Kentucky Division
2125 Lake Jericho Road
Smithfield, KY 40068
Phone: 502.845.0154
Fax: 502.849.0444