


STILE & RAIL ● SKETCH FACE ● APPLIED MOULDING DOOR ELEVATIONS

CUSTOMER <div style="border: 1px solid black; height: 20px; width: 100%;"></div>	JOB NAME & NO. <div style="border: 1px solid black; height: 20px; width: 100%;"></div>	P.O. NUMBER <div style="border: 1px solid black; height: 20px; width: 100%;"></div>
---	---	--

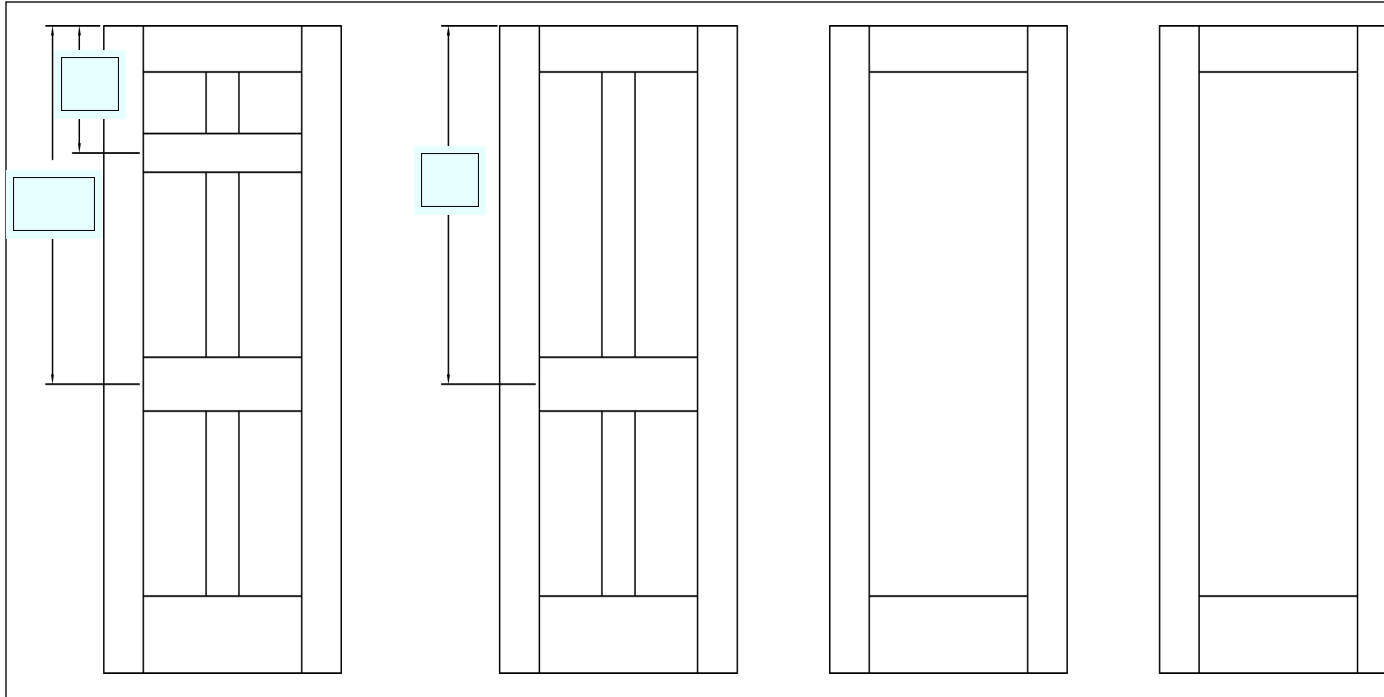

STILE AND RAIL DOORS

Layout

Profile Type

Opening Type

Panels:

Standard Membrane Pressed Rim Banded

Flat: Thickness

Panel Thickness:

Standard Custom

Standard Dimensions (or indicate otherwise)

Stiles 6"

Top Rail 6"

Cross Rail 4"

Lock Rail 6"

Mullion 4"

Bottom Rail 10"

NOTE: Dimensions may need to change depending on hardware type, location, opening type and fire rating.

FACE DIMENSIONS

- Before prefit - Stiles will be reduced equally, top rail .125" and bottom rail
- After prefit - Opening will be reduced. If lock rail required top opening will be reduced .125" and bottom opening by undercut.

NOTE - Face dimensions exclude sticking or bead.

STYLUS MOULDING

- S1 S2 Custom

APPLIED MOULDING

- Eggers Std. Custom

E

SKETCH FACE ON APPLIED MOULDING

Indicate grain direction for each component.
Note standard tolerance is +/- 1/8"
Note dimensions are to edge of moulding.



Stile and Rail Doors, Door Frames
Veneered Components, Plywood

Two Rivers Division
One Eggers Drive
Two Rivers, WI 54241
Phone: 920.793.1351
Fax: 920.793.2958

Flush Doors

Neeah Division
164 North Lake Street
Neeah, WI 54956
Phone: 920.722.6444
Fax: 920.722.0357

Architectural Veneer Faces,
Custom Wood Products, Plywood

Kentucky Division
2125 Lake Jericho Road
Smithfield, KY 40068
Phone: 502.845.0154
Fax: 502.849.0444